

Polysafe™ Stone & Wood

PRL Pendulum Test
36+
Sustainable Slip Resistance

P3

AS 4586

安全地板
打造现代空间

CREATE SPACES WITHIN SPACES

现代设计

Polysafe Stone fx 系列地板独具特色，通过内置可持续防湿滑功能保障，彰显材料表面的美感与仿真性。这种耐用型乙烯基板安全地板采用 34 种商业地板设计，有高清晰度理石、混凝土和木纹等多种效果，还有一系列冷暖色调可供选择。


Polysafe 理石和木纹 fx 系列地板提供了实现安全现代室内空间的无限可能性。

创造独特的地面设计或实现多功能分区，搭配以相得益彰的理石和木纹色调。

专为安全设计

在整个性能层混合了基本上看不到的氧化铝颗粒，提供了既实用又美观的安全地板。

这些不含碳化硅的安全颗粒可确保 Polysafe Stone fx 地板完全符合健康、安全和环境标准，实现可持续湿滑阻抗，钟摆湿测试达到 36+。

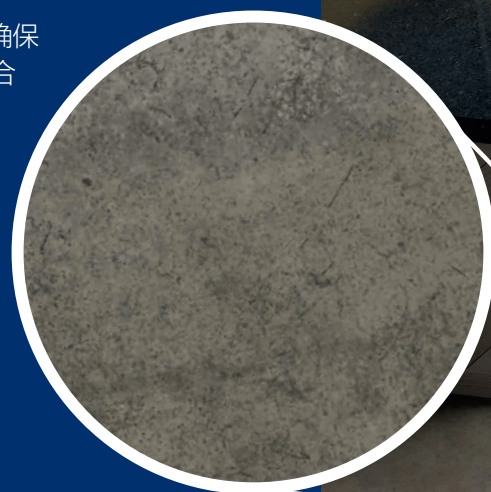

美观与性能
相结合的
安全地板





Spaces to WORK

前厅安全保证

理石和木纹效果地板形成了鲜明的对比，优美地诠释了设计与功能的完美契合，是注重美观和安全性能的繁忙零售区域内饰的完美解决方案。

通过在入口和走廊等人流量大的环境中使用完全地板，应对人流附带的污染物和日常溢出物带来的潜在滑倒风险，从而保护客户和员工。

设计美观
确保安全





Spaces to LIVE

沉静温暖的色调

各种现代理石设计和温暖的木纹效果，可以单独使用呈现一种温馨的家庭式氛围，或在更大的空间打造和谐的区域。

这些极具吸引力的设计，结合安全地板性能，可承受日常溢出和污染物，使Polysafe理石和木纹 fx地板系列非常适合任何共享生活空间、住房或商业环境。

功能性区域
实现安全的
开放式生活空间

Spaces to HEAL

卫生且低维护

采用混凝土和木纹舒缓的暖色调，给医院内饰以一种清新的非临床感，有利于营造出一种让患者和员工都感到振奋和积极的舒适环境。

维护地板的外观至关重要，特别是在高度可见的区域，需要保持卫生和安全。Polysafe PUR产品的增强功能安全可靠，经久耐用，既易于维护，又确保了注重设计感的前厅区域实现最佳外观。

温馨卫生
内置防滑性能

Dark Concrete 5089 & American Oak 3387





Spaces to ENJOY

非常适合大面积区域

对于想要实现现代且有设计感的内饰，可以选用美观的都市和轻质混凝土复制品，实现完全的设计自由，满足大规模面向客户服务空间的所有安全和维护要求。

Polysafe理石和木纹fx地板系列非常适合人流量大的零售和商业休闲场所内饰，可以在整个场所中铺设，包括通往外部的通道区域或有溢出风险的区域。

餐饮场所 柔和的背景



学习、就餐或
只是小聚的
多功能解决方案

Spaces to LEARN

潜在溢出风险

Polysafe理石和木纹fx地板系列保证在整个寿命周期中提供可持续的湿滑阻力，适用于大规模教育机构的内饰，特别是在有溢出风险的繁忙食品服务区。

创造怡人、舒适、实用的环境，且有多种沉静的理石和木纹灰色色调设计可供选择，可附以寻路功能来指引用户或实现功能性分区。





相得益彰、
对比鲜明的
理石和木纹设计

Polysafe™ Wood fx PUR



Oiled Oak 3374
plank w/l: 166 x 1500mm

w/r 3374
LRV 37




Sun Bleached Oak 3372
plank w/l: 200 x 1500mm

w/r 3372
LRV 31




Silver Oak 3357
plank w/l: 83 x 333 / 666mm

w/r 3237
LRV 23




Roasted Lined Ash 3375
plank w/l: 166 x 1500mm

w/r 9831
LRV 30

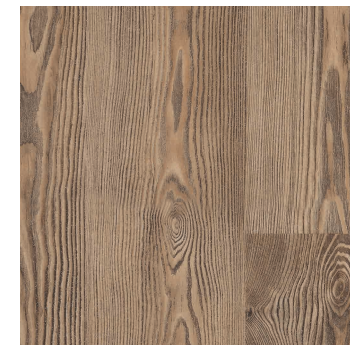


Tropical Pine 3376
plank w/l: 166 x 1500mm

w/r 9822
LRV 22

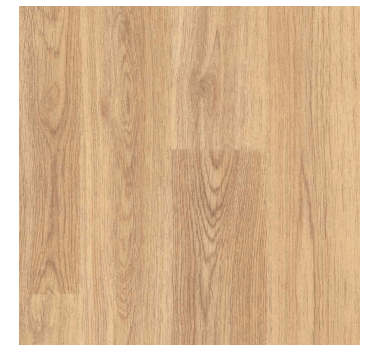


American Oak 3387
plank w/l: 100 x 1000mm

w/r 3380
LRV 37



Warm Beech 3297
plank w/l: 100 x 500mm

w/r 3290
LRV 35

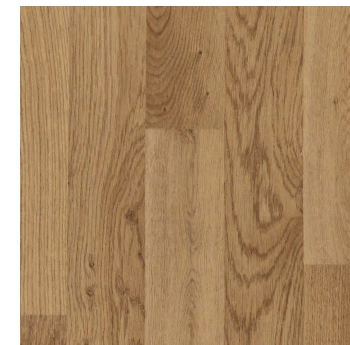


Rustic Oak 3337
plank w/l: 83 x 333 / 666mm

w/r 3330
LRV 26




Classic Oak 3107
plank w/l: 166 x 1500mm

w/r 3330
LRV 29




European Oak 3347
plank w/l: 100 x 1000mm

w/r 3340
LRV 23

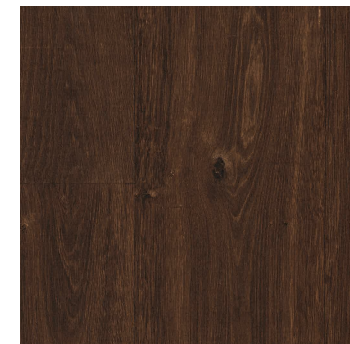

Aged Oak 3373
plank w/l: 200 x 1500mm


w/r 9824
LRV 9

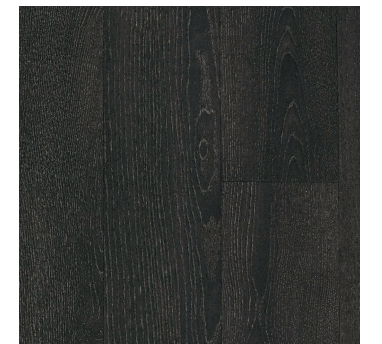

Nero Oak 3371
plank w/l: 125 x 1000mm


w/r 9842
LRV 7

Polysafe™ Stone *fx* PUR

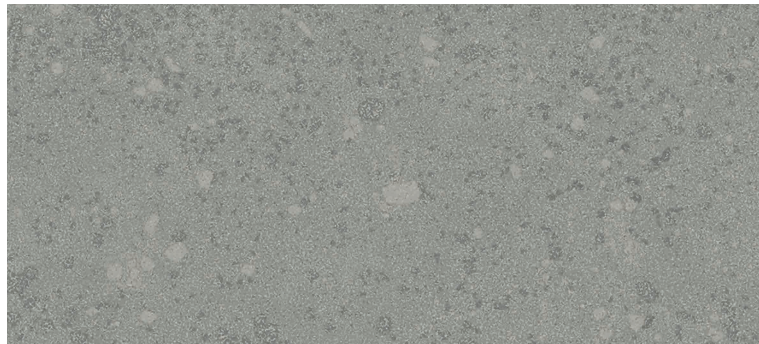

Dove Slate **6012**
NCS S 3502-G

w/r 6012
LRV 35



Urban Concrete **6013**
NCS S 5502-Y

w/r 6013
LRV 24




Jurassic Stone **6011**
NCS S 4500-N

w/r 6011
LRV 22



Natural Slate **6014**
NCS S 4502-G

w/r 6014
LRV 22



Dark Concrete **5089**
NCS S 5502-Y

w/r 5089
LRV 23



Flagstone Grey **5091**
NCS S 4005-Y50R

w/r 5091
LRV 35



Clay Stone **5092**
NCS S 5005-Y80R

w/r 5092
LRV 25




Light Concrete **5087**
NCS S 4005-G80Y

w/r 5087
LRV 33



Deep Fossil **5082**
NCS S 5502-Y

w/r 5082
LRV 22



Pebble Grey **5083**
NCS S 4000-N

w/r 5083
LRV 34



Muted Stone **5081**
NCS S 2005-Y50R

w/r 5081
LRV 46



Grey Flourite **4042**
NCS S 2002-Y50R

w/r 9803
LRV 48



Agate Grey **4043**
NCS S 3500-N

w/r 9804
LRV 38



Galena **4047**
NCS S 4502-R

w/r 9807
LRV 27



Gypsum **4044**
NCS S 2005-Y30R

w/r 9800
LRV 50




Copal **4046**
NCS S 3010-Y20R

w/r 9801
LRV 39



Andesite **4049**
NCS S 4005-Y50R

w/r 9802
LRV 26




Angelite **4051**
NCS S 3010-R90B

w/r 9806
LRV 40



Blue Quartz **4054**
NCS S 6010-R90B

w/r 9808
LRV 17



Jetstone **4045**
NCS S 6500-N

w/r 9805
LRV 15



Pearl River **5084**
NCS S 1000-N

w/r 5084
LRV 63



Valley Rock **5086**
NCS S 7005-Y20R

w/r 5086
LRV 14


w/r = weld rod NCS = Natural Colour System LRV = Light Reflectance Value

Decoration and shade may vary from the sample shown.


产品测试

在有较高潜在滑倒和绊倒风险的地区,选择一种符合健康、安全 and 环境标准、且能在产品的寿命周期内提供可持续防滑阻抗的地板解决方案至关重要。


钟摆测试

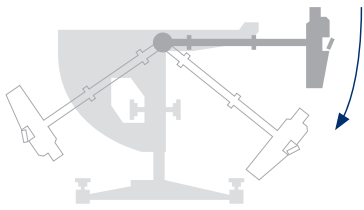

斜坡测试



5万次循环测试

**DIN 51130 & AS 4586**

R10



EN 13845

The European safety flooring standard

Conformance to the 50,000 cycles abrasion test demonstrates that the performance particles within a safety floor are durable, offering longevity and sustainable performance for the guaranteed life of the product.

符合 5 万次周期磨损测试, 证明安全地板的性能颗粒经久耐用, 使用寿命长, 且可保证在产品寿命周期内实现可持续性能。

PUR
TECHNOLOGY

- ✓ 易于清洁
- ✓ 节约维护成本
- ✓ 最佳外观保持
- ✓ 耐染色和化学品



For more information regarding our recommended safety flooring finishes or product testing please contact Customer Technical Service Department on **+44 (0)161 767 1912** or email **tech@polyflor.com** Alternatively please visit **polyflor.com/safety**



+44 (0)161 767 255
polyflor.com

技术规范

	Gauge 厚度	EN 428/ISO 24346	2.0mm
	Wear Layer 耐磨层厚度	EN 429/ISO 24340	0.70mm
	Roll Size 卷材尺寸	EN 426/ISO 24341	2m x 20m = 40m²
	Total Weight 总重量	EN 430/ISO 23997	2780g/m²
	General Performance 生产标准	EN 13845 ASTM F1303	Conforms 符合 Conforms 符合
	Use Area 使用区域	EN 685/ISO 10874	  
	Resistance to Chemicals 抗化学物质	EN 423/ISO 26987	Good chemical resistance 良好的抗化学物质性能
	Reaction to Fire 防火等级	EN 13501-1 ASTM E648	Class Bfl-S1 Class 1
	Abrasion Resistance 耐磨性	EN 13845 EN 649	50,000 cycles 5万个周期 Group T T 组

Enhanced Slip Resistance
强防滑等级

The wet slip resistance across all Polysafe products is sustainable throughout the guaranteed life of the product, with strict adherence to HSE Guidelines. For further clarification regarding slip resistance, consult Polyflor.

所有 Polysafe 产品的湿滑阻坑保证在产品的整个寿命周期内是可持续的, 严格遵守健康、安全和环境准则。有关防滑阻坑的更多说明, 请咨询 Polyflor。

	EN 13845 AS 4586 DIN 51130 RRL Pendulum Test Surface Roughness	ESf R10 R10 ≥36 (wet test - 4S Rubber/Slider 96) Rz ≥20µm
	Electrical Behaviour (body voltage) 电气性能（主体电压）	EN 1815 ≤2kV Classified as 'antistatic' ≤2kV 分类为 '防静电'
	VOC Emissions 挥发性有机化合物排放	AgBB VOC test Floorscore Finnish M1 Classification Very low emissions 极低的排放量 Certified 认证 Certified 认证

Agrement Assurance – Polysafe Stone & Wood fx PUR has been independently assessed by the British Board of Agrement and product performance is assured for at least 10 years in recommended use areas. With proper maintenance, the appearance, colour and slip resistance will be retained during this period.

英国建筑委员会——Polysafe理石和木纹fx PUR地板获英国建筑委员会独立评估，产品性能在推荐使用区域可至少保证10年使用寿命。并且如果加以适当的维护，在此期间将可保持外观、颜色和防滑阻抗。

Environmentally Preferable Flooring - Generic EN 15804 Environmental Product Declaration (EPD) available on request. It is 100% recyclable and contains recycled material. Recyclable via the Recofloor scheme. Visit www.polyflor.com/sustainability.
环保优选地板 一 有《通用 EN 15804 环境产品声明 (EPD) 》备案。100%可回收, 包含回收材料。可通过 Recofloor 方案回收。请访问: www.polyflor.com/sustainability

Polysafe PUR - Polysafe Stone & Wood fx PUR features a high quality, cross-linked polyurethane reinforcement, UV cured to provide superior cleaning benefits, life cycle maintenance savings and optimum appearance retention. As with all Polysafe products, Polysafe Stone & Wood fx PUR should not have a polish applied.

Polysafe PUR – Polysafe理石和木纹 fx PUR 地板具有高品质、交连聚氨酯增强、紫外线固化的特点, 可提供卓越的清洁优势、生命周期维护节省和最佳外观保持。与所有Polysafe产品一样, Polysafe理石和木纹 fx PUR地板不应使用抛光剂。

Hygiene - All Polyflor commercial sheet vinyl ranges provide a continuous, impervious and hygienic flooring solution which can be confidently cleaned in accordance with recommended maintenance procedures and approved maintenance products. The implementation of an effective cleaning regime is the most important defence against infection.

卫生 — 所有 Polyflor 商用乙烯基板材系列提供连续、无渗透且卫生的地板解决方案，采用符合建议的维护程序和批准的维护产品，完全可以进行完全清洁。实施有效的清洁制度是防止污染的最重要防御手段。

Polysafe safety flooring ranges have good resistance to dilute acids and alkalis, are compatible for use with the most commonly used alco-based hand gels and are suitable for steam cleaning on a periodic basis. Chemical resistance charts available on request. For information regarding handling and installation, adhesives, maintenance, applications, chemical resistance and product warranty, consult Polyflor Customer Technical Services on +44 (0)161 767 1912, or email tech@polyflor.com.

As with all Polysafe products, Polysafe Stone & Wood fx PUR should not have a polish applied. For best results, flooring must be reversed laid. The data presented is correct at the time of printing. For latest information, please visit our website polyflor.com.

Polysafe地板系列对稀释酸和碱具有良好的耐化学性,与最常用的含酒精凝胶洗手液兼容,且适合定期进行蒸汽清洗。可应要求提供耐化学品性能图表。有关处理和安装、粘合剂、维护、施用化学品、耐化学性能和产品保修等信息,请咨询 Polyflor 客户技术服务电话: +44 (0) 161 767 1912, 或发送电子邮件: tech@polyflor.com。

与所有Polysafe产品一样，Polysafe理石和木纹 fx PUR 产品不应使用抛光剂。为达到最佳效果，地板必须倒铺。

打印时数据是正确的。有关最新信息，请访问我们的网站：polyflor.com

装饰和色彩可能与所示样品略有不同

POLYFLOR™ CHINA OFFICES

保丽中国上海总部

中国上海市徐汇区肇嘉浜路
77号青松城大酒店1015室

电话: 86-02164437628
电子邮件: infosh@polyflor.com.cn
网站: www.polyflor.com.cn

保丽中国广东总部

中国广州市人民中路555号
美国银行大厦1216室

电话: 86-02081300180
电子邮件: infogz@polyflor.com.cn
网站: www.polyflor.com.cn



Polysafe™

POLYFLOR™ INTERNATIONAL

Australia

Polyflor Australia
Tel: 1800 777 425
E-mail: sales@polyflor.com.au

Canada

Polyflor Canada Inc.
Tel: +1 905 364 3000
E-mail: sales@polyflor.ca

China

Polyflor Hong Kong
Tel: +(852) 2865 0101
E-mail: info@polyflor.com.hk

France

James Halstead France SAS
Tel: +33 (0) 8 20 20 32 11
E-mail: info@jhfrance.fr

Germany

objectflor Art und Design Belags GmbH
Tel: +49 (0) 2236 966 330
E-mail: info@objectflor.de

India

Polyflor India Pvt Ltd
Tel: +91 22 4023 2485
E-mail: info@polyflor.co.in

Ireland

Polyflor Ireland
Tel: +353 (1) 864 9304
E-mail: salesireland@polyflor.com

Middle East

Polyflor FZE
Tel: +971 50 406 8114
E-mail: aelwakil@polyflorfze.ae

New Zealand

Polyflor New Zealand Ltd
Tel: 0800 765 935
E-mail: sales@polyflor.co.nz

Norway

Polyflor Nordic
Tel: +47 23 00 84 00
E-mail: firmapost@polyflor.no

Poland

Polflor Sp. Z o.o.
Tel: +48 (0) 61 820 3155
E-mail: polyflor@polflor.com.pl

South Africa

Poly Sales Africa (Pty.) Ltd
Tel: +27 (0) 11 609 3500
E-mail: info@polyflor.co.za

Sweden

FalckDesign AB
Tel: +46 (0) 300 15820
E-mail: info@falckdesign.com

POLYFLOR™ UK

Polyflor Ltd. PO Box 3, Radcliffe New Road,
Whitefield, Manchester, M45 7NR

UK Sales Direct: +44 (0) 161 767 1122
UK Samples Direct: +44 (0) 161 767 2551
Export Sales Direct: +44 (0) 161 767 1913
Technical Support: +44 (0) 161 767 1912
E-mail: info@polyflor.com

polyflor.com/safety

POLYFLOR™
COVERING THE WORLD



UK manufactured